



Marlow®



MARLOW Mattbraided rope

CRUISING

Soft-spun polyester rope.

Ideal for: all types of sheets (cruising), jib furlers, reefs.

Features: soft and easy to use, excellent control even when wet.

Core: 12-strand polyester.

Cover: soft-spun 24-plait polyester.

White	Blue	Red	Black	Ø mm	Breaking load kg	Weight kg/100 m	m
-	-	06.435.04RO	06.435.04NE	4	293	1,3	200
06.434.05BI	06.435.05BL	06.435.05RO	06.435.05NE	5	415	2	200
06.434.06BI	06.435.06BL	06.435.06RO	06.435.06NE	6	600	2,8	200
-	06.435.08BL	06.435.08RO	06.435.08NE	8	1120	5,4	200
06.434.10BI	06.435.10BL	06.435.10RO	06.435.10NE	10	1980	7	200
-	06.435.12BL	06.435.12RO	06.435.12NE	12	2810	9,9	200
-	06.435.14BL	06.435.14RO	06.435.14NE	14	3300	12,6	100
06.434.16BI	-	-	-	16	5430	17,8	100

Marlow®



MARLOW Doublebraided white rope with fleck

CRUISING

White polyester braid with fleck.

Ideal for: all types of sheets (cruising), jib furlers, reefs, general purposes.

Features: soft and easy to use; easy to grip and knot.

Core: 12-strand polyester.

Cover: high-strength 24-plait polyester.

Fleck colour			Solid colour	Ø mm	Breaking load kg	Weight kg/100 m	m
Blue	Red	Green	White				
06.428.06BL	06.428.06RO	06.428.06VE	06.428.06BI	6	1390	2,8	200
06.428.08BL	06.428.08RO	06.428.08VE	06.428.08BI	8	2560	4,8	200
06.428.10BL	06.428.10RO	06.428.10VE	06.428.10BI	10	3690	7,4	200
06.428.12BL	06.428.12RO	06.428.12VE	06.428.12BI	12	4760	11,1	200
06.428.14BL	06.428.14RO	06.428.14VE	06.428.14BI	14	6050	15,6	100
06.428.16BL	-	-	-	16	7230	23,2	100

Marlow®



MARLOW Marlowbraided rope, solid colour

CRUISING

Polyester braid.

Ideal for: halyards(cruising), vang; up/downhaul, low-stretch sheets.

Features: good resistance to elongation; easy to splice.

Core: 3-strand polyester.


Cover: high-strength 16-plait polyester.

Blue	Red	Green	White	Blue navy	Ø mm	Breaking load kg	Weight kg/100 m	m
06.427.06BL	06.427.06RO	06.427.06VE	-	-	6	986	2,7	200
06.427.08BL	06.427.08RO	06.427.08VE	06.427.08BI	-	8	1580	4,5	200
06.427.10BL	06.427.10RO	06.427.10VE	06.427.10BI	06.427.10BN	10	2850	7,3	200
06.427.12BL	06.427.12RO	-	06.427.12BI	06.427.12BN	12	4450	10	200
-	-	-	06.427.14BI	06.427.14BN	14	5460	14,5	200

MARLOW Marlowbraid white rope with fleck

CRUISING Polyester braid.
Ideal for: halyards (cruising), vang, up/downhaul, low-stretch sheets.
Features: good elongation resistance, it can be sliced.
Core: 3-strand polyester.
Cover: high-resistance 16-plait polyester.

Fleck colour					Ø mm	Breaking load kg	Weight kg/100 m	m
Blue	Gold	Red	Green	Black				
06.432.06BL	06.432.06OR	06.432.06RO	06.432.06VE	06.432.06NE	6	986	2.7	200
06.432.08BL	06.432.08OR	06.432.08RO	06.432.08VE	06.432.08NE	8	1580	4.5	200
06.432.10BL	06.432.10OR	06.432.10RO	06.432.10VE	06.432.10NE	10	2850	7.3	200
06.432.12BL	06.432.12OR	06.432.12RO	06.432.12VE	06.432.12NE	12	4450	10	200
06.432.14BL	-	06.432.14RO	06.432.14VE	-	14	5460	14.5	100
06.432.16BL	-	06.432.16RO	-	-	16	7420	19	100



MARLOW D2 Competition 78 braid with fleck

CRUISING **Ideal for:** halyards, sheets, vang, downhauls, multiple applications, etc.
Suitable for: top-level cruising or club regattas, it is a compromise between the D2 Racing professional braid and the Marlowbraid.
Core: 12-strand Dyneema SK78.
Cover: high-strength 16-plait polyester.

D2 Competition with fleck			Ø mm	Breaking load kg	Weight kg/100 m	m
Blue	Red	White				
06.433.08BL	-	06.433.08BI	8	2025	4.93	200
-	06.433.10RO	06.433.10BI	10	3487	7.63	200
-	06.433.12RO	06.433.12BI	12	5360	9.71	200



MARLOW Doublebraid Marble Colour rope

CRUISING Polyester braid in bright colors.
Ideal for : Sheets (cruising), jib furlers, reefs, general purposes.
Features: Soft and easy to use, easy to grip and knot.
Core: 12-strand polyester.
Cover: high-strength 24-plait polyester.



Temporarily valid for black and grey



Blue	Red	Green	Grey	Black	Ø mm	Breaking Load kg	Weight kg/ 100m	m
06.423.06BL	06.423.06RO	06.423.06VE	06.423.06GR	06.423.06NE	6	1390	2,84	200
06.423.08BL	06.423.08RO	06.423.08VE	06.423.08GR	06.423.08NE	8	2560	4.80	200
06.423.10BL	06.423.10RO	06.423.10VE	06.423.10GR	06.423.10NE	10	3690	7.47	200
06.423.12BL	06.423.12RO	06.423.12VE	06.423.12GR	06.423.12NE	12	4760	11.10	200
06.423.14BL	06.423.14RO	06.423.14VE	06.423.14GR	06.423.14NE	14	6050	15.60	100


MARLOW 3-Strand Pre-Stretched rope

CRUISING 3-strand pre-stretched polyester rope.
Ideal for: small and medium boat halyards (cruising), LAZY JACK, general purposes.
Features: 100% abrasion-resistant and UV-resistant. It doesn't absorb water.
Core: continuous polyester.



White	Ø mm	Breaking load kg	Weight kg/100m	m
06.431.05	5	1030	2.07	200
06.431.06	6	1690	3.06	200
06.431.08	8	2180	4.81	200
06.431.10	10	2640	8.23	200
06.431.12	12	3340	10.7	100

Marlow®



MARLOW D2 Racing 78 braid (with fleck) and Classic rope (solid colour)

HIGH PERFORMANCE

Ideal for: halyards, low-stretch sheets, reefs, multiple professional applications.

RACING

Features: floating, stretch-resistant, easy to splice, the cover can be removed.

Core: 12-strand Dyneema SK78.

Cover: high-strength 24-plait polyester.

D2 RACING with fleck					D2 CLASSIC solid colours		Ø mm	Breaking load kg	Weight kg/100 m	m
Black	Blue	Yellow	Red	Green	White	Blue Navy				
06.429.08NE	06.429.08BL	06.429.08LI	06.429.08RO	06.429.08VE	-	06.430.08BN	8	3490	3,9	100
06.429.10NE	06.429.10BL	06.429.10LI	06.429.10RO	06.429.10VE	06.430.10BI	06.430.10BN	10	5360	5,92	100
06.429.12NE	06.429.12BL	06.429.12LI	06.429.12RO	06.429.12VE	06.430.12BI	06.430.12BN	12	6940	9,29	100
-	06.429.14BL	-	06.429.14RO	06.429.14VE	06.430.14BI	06.430.14BN	14	9274	11,66	100
-	06.429.16BL	-	06.429.16RO	-	06.430.16BI	06.430.16BN	16	12800	16,6	100



D2 Club line

Ideal for: halyards, low-stretch sheets, reefs, multiple professional applications.

Features: floating, stretch-resistant, easy to splice, the cover can be removed.

Core: 12-strand Dyneema SK75 and polypropylene.

Cover: high-strength 16-plait polyester.

Blue	Green	Red	Black	Ø mm	Breaking load kg	Weight kg/100 m	m
06.477.08BL	06.477.08VE	06.477.08RO	06.477.08NE	8	2480	4,00	200
06.477.10BL	06.477.10VE	06.477.10RO	06.477.10NE	10	3970	6,43	200
06.477.12BL	06.477.12VE	06.477.12RO	06.477.12NE	12	5950	8,64	200
06.477.14BL	06.477.14VE	06.477.14RO	06.477.14NE	14	7440	11,2	200

Marlow®



MARLOW 8-Plait Pre-Stretched rope

CRUISING

8-Plait pre-stretched polyester rope.

Ideal for: sheets, spinnakers, downhails, vang, backstays and halyards.

Features: very compact and flexible line, excellent grip on cleats and camcleats, abrasion-resistant.

Core: twisted polyester.

White	Blue	Lime	Red	Ø mm	Breaking load kg	Weight kg/100 m	m
06.436.04BI	06.438.04BL	06.438.04LI	06.438.04RO	4	428	1,3	200
06.436.05BI	06.438.05BL	06.438.05LI	06.438.05RO	5	617	2,1	200
06.436.06BI	06.438.06BL	06.438.06LI	06.438.06RO	6	891	2,9	200
06.436.08BI	-	-	-	8	1410	5,5	200

Marlow®



MARLOW Excel Pro rope

SPORT BOAT

Polyester braid.

Ideal for: sheets, up/downhails, reefs, all dynamic purposes.

Features: quick sliding, flexible, bright colours.

Core: 3-strand polyester.

Cover: high-strength 16-plait polyester.

White	Blue	Lime	Red	Ø mm	Breaking load kg	Weight kg/100 m	m
06.465.02BI	06.465.02BL	06.465.02LI	06.465.02RO	2	110	0,27	200
06.465.03BI	06.465.03BL	06.465.03LI	06.465.03RO	3	202	0,60	200
06.465.04BI	06.465.04BL	06.465.04LI	06.465.04RO	4	377	1,07	200
06.465.05BI	06.465.05BL	06.465.05LI	06.465.05RO	5	702	2,15	200
06.465.06BI	06.465.06BL	06.465.06LI	06.465.06RO	6	986	2,68	200

MARLOW Excel PS12 braid without cover

SPORT BOAT **Ideal for:** halyards, sheets, up/downhaul and cascade systems.
Characteristics: easy to splice when without cover. It can be spliced as leading rope on more performing ropes.
Material: 12-strand pre-stretched polyester.

Blue	Red	White	Ø mm	Breaking load kg	Weight kg/100 m	m
06.421.04BL	06.421.04RO	-	4	678	1.19	200
06.421.05BL	06.421.05RO	06.421.05BI	5	1080	1.91	200
06.421.06BL	06.421.06RO	-	6	1330	2.47	200


Marlow



MARLOW Excel Racing braid

HIGH PERFORMANCE **Ideal for:** halyards, low-stretch sheets, reefs, multiple professional applications.
Features: floating, excellent stretch resistance, easy to splice, the cover can be removed.
Core: 12-strand Dyneema SK78.
Cover: high-strength 16-plait polyester.

Marlow

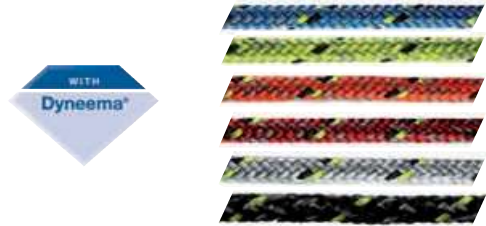

Blue	Red	White	Black	Lime	Orange	Ø mm	Breaking load kg	Weight kg/100 m	m
06.429.15BL	06.429.15RO	-	-	06.429.15LI	-	1.5	139	0.17	100
06.429.02BL	06.429.02RO	-	-	06.429.02LI	-	2	224	0.29	100
06.429.03BL	06.429.03RO	06.429.03BI	06.429.03NE	06.429.03LI	06.429.03AR	3	463	0.58	100
06.429.04BL	06.429.04RO	06.429.04BI	06.429.04NE	06.429.04LI	06.429.04AR	4	995	1.24	100
06.429.06BL	06.429.06RO	06.429.06BI	06.429.06NE	06.429.06LI	06.429.06AR	6	2056	2.41	100

MARLOW Excel Fusion 78 braid with cover

SPORT BOAT Braid with cover.
Ideal for: standard sheets and spinnaker sheets.
Characteristics: very light, it doesn't absorb water, reduced elongation, easy to splice, soft to touch despite its RACING technical characteristics.
Core: pre-stretched Dyneema SK78.
Cover: pre-stretched Dyneema braided with soft polypropylene.

Marlow



Blue	Red	Black	Ø mm	Breaking load kg	Weight kg/100 m	m
06.424.06BL	06.424.06RO	06.424.06NE	6	1088	1.7	100
06.424.08BL	06.424.08RO	06.424.08NE	8	1411	3.0	100
06.424.10BL	06.424.10RO	06.424.10NE	10	2472	4.4	100

MARLOW D12 braid without cover

HIGH PERFORMANCE Braid without cover.
Ideal for: halyards, backstays, vang, tackles, all dynamic applications.
Features: floating, lightweight, stretch resistant, top quality, quick and easy to splice, it doesn't absorb water, UV- and abrasion- resistant Marlow ArmourCoat.
Material: 12-strand Dyneema SK78 with anti-abrasion Marlow ArmourCoat.

Marlow



Fleck colour				Ø mm	Breaking load kg	Weight kg/100 m	m
Blue	Black	Red	White				
06.426.25BL	06.426.25NE	06.426.25RO	-	2.5	569	0.37	200
06.426.30BL	06.426.30NE	06.426.30RO	-	3	995	0.53	200
06.426.40BL	06.426.40NE	06.426.40RO	06.426.40BI	4	2060	0.98	200
06.426.50BL	06.426.50NE	06.426.50RO	06.426.50BI	5	2360	1.28	200
-	06.426.60NE	06.426.60RO	06.426.60BI	6	3490	1.77	200
-	06.426.80NE	-	-	8	6330	5.70	200
-	06.426.10NE	-	-	10	9274	8.35	100

MARLOW Formuline Wind Surf Racing braid

WIND SURF 12-strand Dyneema SK75 braid to adjust the surf sail.
 Extremely light and resistant, it doesn't add unnecessary weight to the sails.

Marlow



White	Black	Ø mm	Breaking load kg	Weight kg/100 m	m
06.422.04	06.422.04NE	3.8	619	0.89	100

Marlow®



MARLOW Kiteline Race / Freestyle braid

KITE

Dyneema SK99 braid for kite surfing.

Black	Blue	Red	Yellow	Ø mm	Breaking load kg	Weight kg/100 m	⌋ m
06.418.11NE	06.418.11BL	06.418.11RO	06.418.11GI	1.5	360	0.15	100

Marlow®



MARLOW mini-reels

DERIVE
USI GENERIC/GENERAL USES

 With **pre-stretched polyester** core. Ideal for: gennaker and spi sheets, assorted colours.

Blister pack with product technical features and tips for use.


Easy-to-display and low.cost: with a minimum investment you can get a vast range of ropes suitable for boats and other various purposes.

Code	Ø mm	Length m
06.465.31	3	17
06.465.21	2	30

Marlow cut-to-length ropes (length upon request)



Marlow®

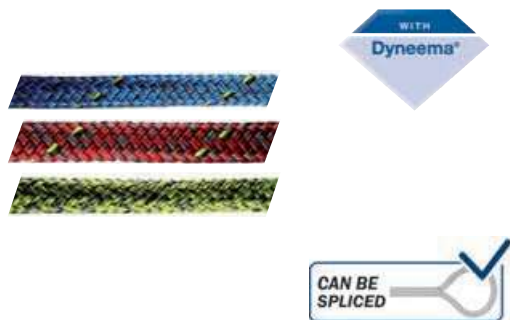

D2 Racing 78 halyard and sheet (similar to 06.429.xx)

HIGH PERFORMANCE
Ideal for: halyards, low-stretch sheets, reefs, multiple professional applications.

Features: floating, excellent stretch resistance, easy to splice, the cover can be removed.

Core: 12-strand Dyneema SK78.

Cover: high-strength 16-plait polyester.

Red	Blue	Yellow	Ø mm
06.419.08RO	06.419.08BL	06.419.08GI	8
06.419.10RO	06.419.10BL	06.419.10GI	10
06.419.12RO	06.419.12BL	06.419.12GI	12

Marlow®



EXCEL D12 DSK 78 braid with no cover (similar to 06.426.xx)

HIGH PERFORMANCE

Braid with no cover.

Ideal for: halyards, backstays, vangs, tackles, all dynamic applications.

Features: floating, lightweight, stretch resistant, top quality, quick and easy to splice, it doesn't absorb water, UV- and abrasion-resistant Marlow ArmourCoat.

Material: 12-strand Dyneema SK78 with anti-abrasion Marlow ArmourCoat.

Black	Ø mm
06.416.03NE	3
06.416.04NE	4
06.416.05NE	5

Ropes and sheets

Low-stretch polyester braid

High-strength 3-strand core, white with coloured fleck. This braid **doesn't float**. Sold in reels.

Code	Ø mm	Breaking load kg	⌄ m	Code	Ø mm	Breaking load kg	⌄ m
06.441.04	4	250	200	06.441.12	12	1700	150
06.441.05	5	300	200	06.441.14	14	2000	100
06.441.06	6	450	200	06.441.16	16	2400	100
06.441.08	8	750	200	06.441.18	18	2700	100
06.441.10	10	1100	200	06.441.20	20	3400	100



High-resistance polypropylene braid

Polyester core, **bright colours**. Sold in reels.


Yellow	Fuchsia	Blue	Green	Red	Ø mm	⌄ m
06.420.02GI	06.420.02FU	06.420.02BL	06.420.02VE	06.420.02RO	2	500
06.420.03GI	06.420.03FU	06.420.03BL	06.420.03VE	06.420.03RO	3	500
06.420.04GI	06.420.04FU	06.420.04BL	06.420.04VE	06.420.04RO	4	200
06.420.05GI	06.420.05FU	06.420.05BL	06.420.05VE	06.420.05RO	5	200
06.420.06GI	06.420.06FU	06.420.06BL	06.420.06VE	06.420.06RO	6	200
06.420.08GI	06.420.08FU	06.420.08BL	06.420.08VE	06.420.08RO	8	200
06.420.10GI	06.420.10FU	06.420.10BL	06.420.10VE	06.420.10RO	10	200
06.420.12GI	06.420.12FU	06.420.12BL	06.420.12VE	06.420.12RO	12	200



▲ 06.420.xxGI

High-strength polyester sheet

Antislip, MATT finish with low-elongation 3-strand core. Sold in reels.

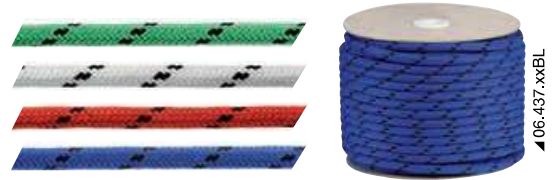

▲ 06.437.xxBL

Blue	Red	White	Yellow	Green	Ø mm	Breaking load kg	⌄ m
06.437.06BL	06.437.06RO	06.437.06BI	06.437.06GI	06.437.06VE	6	500	200
06.437.08BL	06.437.08RO	06.437.08BI	06.437.08GI	06.437.08VE	8	700	200
06.437.10BL	06.437.10RO	06.437.10BI	06.437.10GI	06.437.10VE	10	1150	200
06.437.12BL	06.437.12RO	06.437.12BI	06.437.12GI	06.437.12VE	12	1300	150
06.437.14BL	06.437.14RO	-	-	-	14	1500	130

Double braid made of high-strength low-elongation polyester

Specific for **sheets**. Sold in reels.

Fleck			Ø mm	Breaking load kg	⌄ m
Yellow - Blue	Yellow - Red	Green - Red			
06.447.06	06.457.06	06.456.06	6	800	200
06.447.08	06.457.08	06.456.08	8	1200	200
06.447.10	06.457.10	06.456.10	10	1700	150
06.447.12	06.457.12	06.456.12	12	2100	150
06.447.14	06.457.14	06.456.14	14	2650	100



Double braid made of high-strength low-elongation polyester

Coloured cover with contrasting fleck. Ideal for **sheets**. Sold in reels.

Blue	Yellow	Red	Green	Ø mm	Breaking load kg	⌄ m
06.474.04	06.475.04	06.473.04	06.476.04	4	180	200
06.474.06	06.475.06	06.473.06	06.476.06	6	800	200
06.474.08	06.475.08	06.473.08	06.476.08	8	1200	200
06.474.10	06.475.10	06.473.10	06.476.10	10	1700	150
06.474.12	06.475.12	06.473.12	06.476.12	12	2100	150
06.474.14	06.475.14	06.473.14	06.476.14	14	2650	100



Double braid for Dyneema sheets

Dyneema SK75 braid core, 16-plait high-strength polyester cover. High-strength, low-elongation and lightweight professional braid. **White** with coloured flecks. Sold in reels.

Fleck			Ø mm	Breaking load kg	⌄ m
Blue	Yellow	Red			
06.460.02	06.461.02	06.459.02	2	220	100
06.460.03	06.461.03	06.459.03	3	420	100
06.460.04	06.461.04	06.459.04	4	550	100
06.460.06	06.461.06	06.459.06	6	1300	100
06.460.08	06.461.08	06.459.08	8	2100	100
06.460.10	06.461.10	06.459.10	10	3000	100
06.460.12	06.461.12	06.459.12	12	4000	100



OBLIX™



Extra-strong uncovered braid made of Oblix.

Uncovered and impregnated braid ideal for rips, binding, halyards on hydraulic cylinder, rigging, winches, dinghy haulage and other static or dynamic uses. Very easy to splice.

Made of 12-strand OBLIX™ yarn, it compares the same breaking loads of Dyneema braids also featuring extremely good abrasion and UV-ray resistance. Teflon EcoElite™ finish to make the braid water repellent.

Grey	Red	Ø mm	Breaking load kg	m
06.462.04	06.463.04	4	1450	100
06.462.05	06.463.05	5	2200	100
06.462.06	06.463.06	6	3200	100
06.462.08	06.463.08	8	5800	100

Mooring lines and fenders

High-strength 3-strand polyester line

ALTA TENACITÀ / HIGH-STRENGTH

Double-torsion 3-strand line. This line doesn't float. Sold in reels.

White		Blue		Colour		Breaking load kg	Ø mm	m
				Grey	Black			
06.440.06	530	06.453.06	-	-	06.450.06	430	6	200
06.440.08	900	06.453.08	-	-	06.450.08	700	8	200
06.440.10	1300	06.453.10	06.454.10	06.454.10	06.450.10	1100	10	200
06.440.12	2000	06.453.12	06.454.12	06.454.12	06.450.12	1600	12	200
06.440.14	2150	06.453.14	06.454.14	06.454.14	06.450.14	2150	14	100
06.440.16	3600	06.453.16	06.454.16	06.454.16	06.450.16	3000	16	100
06.440.18	4700	06.453.18	-	-	06.450.18	3850	18	100
06.440.20	5200	06.453.20	-	-	06.450.20	4200	20	100
06.440.22	5800	06.453.22	-	-	06.450.22	4700	22	100
06.440.24	6750	06.453.24	-	-	06.450.24	5500	24	100
06.440.28	7800	06.453.28	-	-	06.450.28	7000	28	100
06.440.32	8700	06.453.32	-	-	06.450.32	9100	32	100
06.440.36	11100	-	-	-	06.450.36	10600	36	100
06.440.40	13500	-	-	-	06.450.40	14000	40	100




New 3-strand polypropylene line

POLYPROPYLENE FLOATING



Colour		Breaking load kg	Ø mm	m
White	Black			
06.485.08	06.486.08	500	8	200
06.485.10	06.486.10	750	10	200
06.485.12	06.486.12	950	12	200
06.485.14	06.486.14	1400	14	100
06.485.16	06.486.16	2000	16	100



Floating levilene braid

High strength, reduced elongation, easy to handle. Sold in reels.

White	Orange	White-orange	Grey	Lime (fluo color)	Black	Ø mm	Breaking load kg	m
06.445.06BI	06.445.06AR	-	-	-	06.445.06NE	6	200	200
-	-	06.445.07BA	-	06.445.07LI	-	7.5	300	200
06.445.08BI	06.445.08AR	-	-	-	06.445.08NE	8	350	200
06.445.10BI	06.445.10AR	-	-	-	06.445.10NE	10	600	200
06.445.12BI	06.445.12AR	-	06.449.12	-	06.445.12NE	12	800	200
06.445.14BI	-	-	06.449.14	-	-	14	900	130
-	-	-	-	-	06.445.14NE	14	900	150
06.445.16BI	-	-	-	-	06.445.16NE	16	1000	100

MARLOW mooring lines

ORMEGGIO DOCKING

High-strength 3-strand polyester.

White	Blue	Black	Ø mm	Breaking load kg	m
06.472.06	06.484.06	06.482.06	6	951	200
06.472.08	06.484.08	06.482.08	8	1465	200
06.472.10	06.484.10	06.482.10	10	2570	200
06.472.12	06.484.12	06.482.12	12	3170	200
06.472.14	06.484.14	06.482.14	14	3930	100
06.472.16	06.484.16	06.482.16	16	4766	100
06.472.18	06.484.18	06.482.18	18	6600	100
06.472.20	06.484.20	06.482.20	20	9230	100
06.472.24	06.484.24	06.482.24	24	11210	100
06.472.28	06.484.28	06.482.28	28	14640	100



Double braid made of soft-spun high-strength polyester, 16 x 5- to 16-mm Ø strands, 24 x 18- to 24-mm Ø strands.

ALTA TENACITÀ / HIGH-STRENGTH

For mooring and sheets. Sold in reels.

Colour					Ø mm	m
White	Breaking load kg	Blue	Black	Breaking load kg		
06.467.05	350	06.468.05	06.469.05	350	5	200
06.467.06	500	06.468.06	06.469.06	500	6	200
06.467.08	800	06.468.08	06.469.08	720	8	200
06.467.10	1440	06.468.10	06.469.10	1200	10	200
06.467.12	2040	06.468.12	06.469.12	1800	12	200
06.467.14	2300	06.468.14	06.469.14	2000	14	100
06.467.16	2840	06.468.16	06.469.16	2500	16	100
06.467.18	4460	06.468.18	06.469.18	4000	18	100
06.467.20	5250	06.468.20	06.469.20	4500	20	100
06.467.24	7950	06.468.24	06.469.24	6800	24	100



Square Line braid made of high-strength 8-strand polyester

Ideal for mooring lines. Very easy to splice, sturdy and handy. Sold in reels.

White	Blue	Black	Ø mm	Breaking load kg	m
06.448.12	06.458.12	06.478.12	12	2000	200
06.448.14	06.458.14	06.478.14	14	2500	200
06.448.16	06.458.16	06.478.16	16	3000	100
06.448.18	06.458.18	06.478.18	18	3900	100
06.448.20	06.458.20	06.478.20	20	4600	100
06.448.22	06.458.22	-	22	5500	100
06.448.24	06.458.24	06.478.24	24	6600	80



High-strength spliced mooring line

Made of 3-strand high-strength polyester, fitted with stainless steel thimbles. Spliced by hand. Sold in reels.

White	Breaking load kg	Blue	Black	Breaking load kg	Ø mm	Length m
06.443.10	1300	-	-	-	10	6
06.443.11	2000	06.443.31	06.443.01	1600	12	6
06.443.12	2000	06.443.32	06.443.02	1600	12	9
06.443.13	2700	06.443.33	06.443.03	2150	14	8
06.443.14	2700	06.443.34	06.443.04	2150	14	12
06.443.15	3600	06.443.35	06.443.05	3000	16	8
06.443.16	3600	06.443.36	06.443.06	3000	16	12
06.443.19	5200	06.443.39	06.443.07	4200	20	8
06.443.20	5200	06.443.40	06.443.08	4200	20	12
06.443.24	6750	06.443.44	06.443.09	5500	24	15
06.443.28	8700	06.443.48	06.443.58	7000	28	15



High-strength spliced mooring line

Made of high-strength 8-strand polyester "Square Line" 06.458.xx, blue colour, fitted with stainless steel thimbles, spliced by hand.

Code	Ø mm	Length m
06.443.50	16	12 (actual line 12,50)
06.443.52	20	12 (actual line 12,50)
06.443.54	24	12 (actual line 15,50)



OSCULATI

High-strength spliced mooring line, double braid

Made of **high-strength polyester double braid** fitted with stainless steel thimble. Spliced by hand.



White	Breaking load kg	Colour		Breaking load kg	Ø mm	Length m
		Blue	Black			
06.443.70	1440	06.443.80	06.443.90	1200	10	6
06.443.71	2040	06.443.81	06.443.91	1800	12	7
06.443.72	2300	06.443.82	06.443.92	2000	14	9
06.443.73	2840	06.443.83	06.443.93	2500	16	11
06.443.74	5250	06.443.84	06.443.94	4500	20	12
06.443.75	7950	06.443.85	06.443.95	6800	24	15




OSCULATI

High-strength eye-spliced mooring line

Made of high-strength polyester double braid with hand-spliced eye.



White	Colour		Colour		Ø mm	Length m	Eye Ø cm
	Breaking load kg	Blue	Black	Breaking load kg			
06.444.30	1400	06.444.41	06.444.90	1200	10	6	12
06.444.32	2040	06.444.43	06.444.92	1800	12	7	14
06.444.34	2300	06.444.45	06.444.94	2300	14	9	18
06.444.36	2840	06.444.47	06.444.96	2500	16	11	20
06.444.38	4500	06.444.48	06.444.98	4500	20	12	20
06.444.39	7950	06.444.49	06.444.99	6800	24	15	22

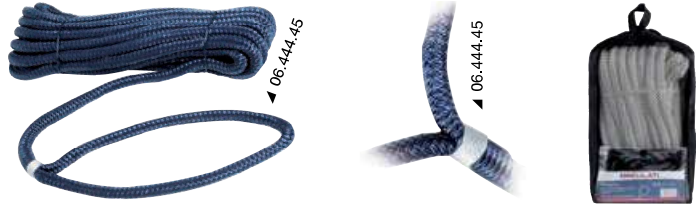

Marlow

MARLOW mooring lines - Blue Ocean

ORMEGGIO DOCKING PRE-SPliced

Pre-spliced line with 50-cm eyelet and yarn termination. Made with **100% recycled polyester bottles**. Every metre of line is made by recycling 7.5 plastic bottles. **Core:** 12 x recycled polyester strands. **Cover:** 24 x recycled polyester plaits. Sold in reels.



Black	Ø mm	Breaking load kg	Weight kg/100 m	Reels m
06.466.12	12	3610	9.94	6
06.466.14	14	4510	12.4	9
06.466.16	16	5860	16.2	12

High visibility floating mooring lines for anchorage to the ground


Polypropylene lines suitable for mooring in bays and with lines on the ground. Being floating, they make it easy to manage the boat and haul it onshore. Slightly elastic, they serve as a mooring device. Yellow colour for high visibility to bathers and other boats.



Yellow	Ø mm	Breaking load kg	Weight kg/100 m	Reels m
06.479.14	14	2124	8,9	200
06.479.18	18	3636	14,6	200
06.479.22	22	4950	21,9	200
06.479.26	26	6822	30,6	200

Straps ideal for mooring to the ground

These straps are very resistant to abrasion and are ideal for mooring to rocks or to rings that might chafe the mooring lines. Recommended for use with lines 06.479.xx.

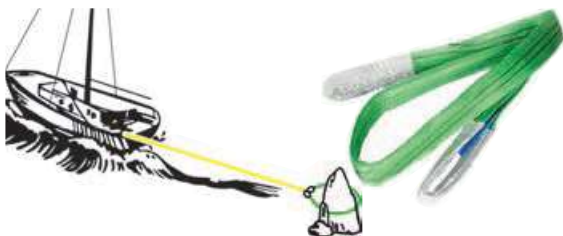

Code	Colour	Length m	Breaking load kg	Tape height mm
06.480.02	purple	2,5	1000	65
06.480.04	green	3,5	2000	65

Megayacht double mooring braid

Made of high-strength polyester. 3-strand double braid making ensuring softness, strength, rub resistance, anti-torsion effect, easier splicing. Sold in reels.

Code	Colour	Ø mm	Strands	Breaking load Kg	m
06.470.24	Black	24	24	13000	100
06.470.28	Black	28	24	18000	100
06.470.32	Black	32	24	22400	100
06.470.36	Black	36	36	26000	100
06.470.40	Black	40	36	30500	100
06.470.44	Black	44	36	35000	100



Mooring double braid for Megayacht CUSTOM MADE

Manufacture service of custom-made mooring lines for megayachts. Minimum order: 2 mooring lines (min. 50 metres of braid). Diametres available: 24 to 44 mm. Colours available: white, blue, black, gold. The bowline can be covered in black leather. Lead time: 21 days.

The double 3-strand braid is very soft, strong and resistant to chafing.

Prices on request.



Anchor rope made of polyester braid with lead core for the first 10 metres

With thimble and spliced by hand. It comes in an elegant nylon bag with blue string.

Code	Ø mm	Length m	Lead core length m	Lead weight kg	Total weight kg
06.446.10	10	30	10	3	5
06.446.12	12	30	10	4	7,5
06.446.13	12	50	20	8	10



Pieces of polyester braid

White colour with fleck, pre-packed, with splicing and nylon thimbles.

Code	Ø mm	Length m	Code	Ø mm	Length m
06.442.01	8	15	06.442.04	10	15
06.442.02	8	30	06.442.05	10	30
06.442.03	8	40	06.442.06	10	40




32-strand polypropylene flat braid

Designed for fastening fenders. Made without a core, easy to splice even for inexperienced boaters. Sold in reels.

White	Blue navy	Black	Gray	Nominal Ø mm	Flat braid mm	m
06.444.10	06.444.20	06.444.80	06.444.70	10	3.3 x 18	50
06.444.11	06.444.21	06.444.81	06.444.71	14	4.5 x 20	50
06.444.12	06.444.22	06.444.82	06.444.72	18	5.6 x 25	50

OSCOLATI

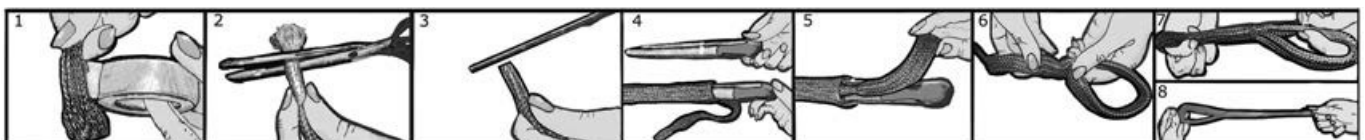

OSCULATI



High-strength eye-spliced fender line

Polyester double braid with **hand-spliced eye**.

White	Blue	Black	Ø mm	Length m
06.444.46	06.444.59	06.444.54	6	1,5
06.444.50	06.444.60	06.444.55	8	1,5
06.444.51	06.444.61	06.444.56	10	2
06.444.52	06.444.62	06.444.57	12	2,5



Reels of high-strength polypropylene braid

Multipurpose product. Sold in reels.

Red	Blue	Green	Yellow	Ø mm	m
06.423.02RO	06.423.02BL	06.423.02VE	06.423.02GI	2	30
06.423.03RO	06.423.03BL	06.423.03VE	06.423.03GI	3	17
06.423.04RO	06.423.04BL	06.423.04VE	06.423.04GI	4	12

Nylon braids



Available in 100-m reels, 100% nylon, for general applications on board, splicing, sewing, etc.


Code	Ø mm
06.439.01	0,5
06.439.02	1
06.439.03	1,5
06.439.04	2

Spare braid for underwater rifles



Made of **stabilized polypropylene**. Sold in reels and not by the metre.

Ø mm			Colour	m
1.5	2	2.5		
06.409.15	06.409.20	06.409.25	Black	500



Nylon handrail netting for pulpit or object holder

With hemming for easy installation. The height is real since it has square links.

Blue	White	Roll m	Real height cm
-	06.348.01	30	45
06.358.00	06.348.00	30	60



Nylon object holder net


Fitted with mounting elastic bands and hooks.

Code	cm
06.331.01	30x20
06.331.02	40x20
06.331.03	20x75



Object holder net with chromed brass frame

Code	cm
06.332.01	34,5x22

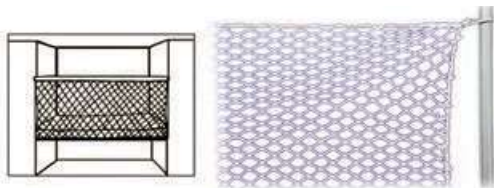

Berth protection netting made of nylon

Fitted with mounting elastic bands.

Code	cm
06.330.00	200x60



Electric rope cutter

Suitable for cutting ropes easily and in a matter of seconds.

Code	volt	Rope size up to mm	Power
06.010.00	220	22	60 W

06.011.00 Spare blade

CADDY organizer for boat-to-dock electric cables and water hoses

Made of sturdy dual-coated PVC, 4-year warranty.


Blue	Black	Length mm	Recommended for hulls m
06.451.08	06.451.10	1000	8-14
06.451.09	06.451.11	1500	15-22



Heat-shrinkable white plastic terminals for lines

14-piece pack. Very fast usage and excellent results. The terminals may also be used as markings along the anchoring lines or along the sheets as point of reference.

Code	For line mm
06.202.00	5 to 13



Nylon stopper balls, various colours

Suitable for rope ends.





White	Blue	Yellow	Black	Red	Ø mm	For ropes Ø mm	ORDER BY BOX
06.281.00BI	06.281.00BL	06.281.00GI	06.281.00NE	06.281.00RO	18	4	10
06.282.00BI	06.282.00BL	06.282.00GI	06.282.00NE	06.282.00RO	26	6	10
06.283.00BI	06.283.00BL	06.283.00GI	06.283.00NE	06.283.00RO	32	8	10

Line drum reel made of reinforced plastic

It can be easily mounted on the pulpit in a matter of seconds. Universal version.

Code	For pipe Ø mm	Length mm	Ø mm	Maximum capacity
06.311.73	25/30	300	180	85 m of 8-mm Ø line

OSCULATI

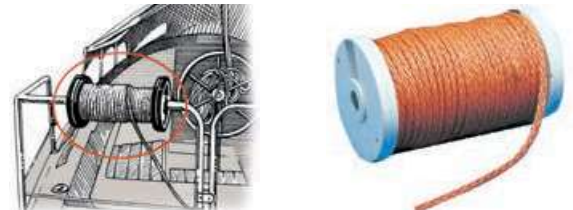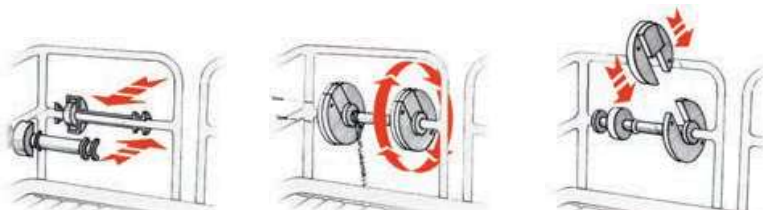

Line drum reel made of polished stainless steel

For mounting with adjustable stainless steel clamp to follow the angle of the pulpits. Roller adjustable friction.

Code	Approx. capacity		Mounting on pipe Ø mm	Roll mm
	Ø 8 mm	Ø 10 mm		
06.311.75	200 m	140 m	22/28	250x290



DOUGLAS MARINE Evo Reel very sturdy tape reel made of stainless steel

AISI 316


Fitted with mounting plate with 8 bores to install stanchions and pulpits at all angles. The tape can be used as stern anchor line, mooring line, towing line and emergency line.

Code	Tape breaking load kg	Fastening on tubes Ø mm	Tape m	mm
06.311.76	2600	20/25	60	Ø 452x44



U Douglas Marine



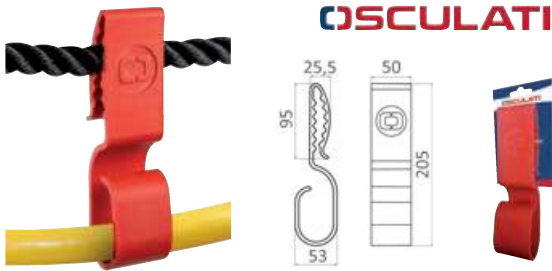

Cable Hook

REGISTERED DESIGN / DISEGNO DEPOSITATO

Cable hook that lets through the power cord and the dock-to-boat water hose. Its design allows for quick fastening to the mooring line. Very sturdy, UV- and sea water-resistant.

Code	For ropes Ø mm	mm
06.319.00	14-30	50x205x53

OSCULATI



Chafe guard

Made of UV-resistant polyester. Hook&loop fastener with straps on the ends. It protects lines against sharp fairleads or toerails on sail boats.

Code	For lines Ø mm	Length mm	Colour
06.452.01	12/16	450	<input type="checkbox"/> white
06.452.02	18/22	450	<input type="checkbox"/> white



Cordura chafe guard

Double-layer, high-resistance cordura with edgeband along the perimeter. Hook&loop fastener and anti-slip tapes. Accurate finish.


Colour		For lines Ø mm	Length mm
white	black		
06.316.01	06.317.01	12/16	600
06.316.02	06.317.02	18/24	600



SPIROLL chafe guard

Made of self-rolling polyurethane, it protects lines from chafing against the fairleads/hawseholes of the boat or against the rings/cleats of the dock. No need to undo splicing, etc. when mounting it.

Code	For line Ø mm	Length mm	Colour
06.453.01	8/16	400	<input checked="" type="checkbox"/> black
06.453.02	16/25	600	<input checked="" type="checkbox"/> black

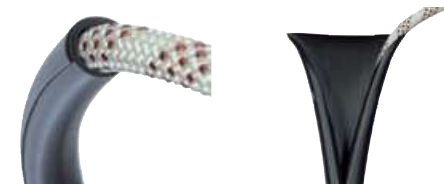

Woollen chafe guard

Made of real wool for 14- to 22-mm Ø lines, 60-cm long. Hook&loop fastener and anti-slip tapes. It prevents lines from chafing the hull (for example the fenders). **Sold in pairs.**

Code	For line Ø mm	Length cm	Colour
06.315.01	14/22	60	<input checked="" type="checkbox"/> Black
06.315.02	14/22	60	<input type="checkbox"/> White



Real leather chafe guards

Chafe guards made of real leather. Very elegant and practical. Hook&loop fastener and anti-slip tapes. They prevent mooring lines from getting worn and chafing the hull. **Sold in pairs.**

Code	For line Ø mm	Length cm	Colour
06.455.01	16/24	50	<input checked="" type="checkbox"/> Black
06.455.02	24/32	80	<input checked="" type="checkbox"/> Black
06.455.03	34/42	100	<input checked="" type="checkbox"/> Black




Rubbing strakes



AISI 316 To prevent mooring line chafing. Made of polished AISI316 stainless steel. Moulded and tapered.

Code	Length mm	Width mm
06.361.50	150	20
06.361.60	200	20
06.361.70	300	20
06.361.80	450	20
06.361.90	650	20
06.361.96	960	20
06.362.70	300	25
06.362.80	450	25
06.362.90	610	25



New


Deluxe rubbing strake



AISI316 **SOLID S.S.**

They protect against rubbing of the mooring lines. Made of thick mirror-polished AISI316 stainless steel. Available in two versions: with screws or studs.

Code	Length A mm	Width B mm	Mounting	Centre distance mm
06.336.32	320	15	Screws (4)	95
06.336.50	500	15	Screws (6)	95
06.337.32	320	15	M5x40 studs (2)	290
06.337.50	500	15	M5x40 studs (3)	235

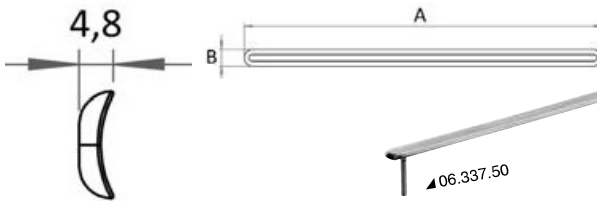

D-shape profile



AISI 316 Rubbing strake to prevent mooring line chafing. Precision casting. Hidden-stud mounting.

Code	Length mm	Width mm	Height mm	Stud Ø mm
06.368.30	300	15	15	5




UHMW adhesive chafe guards



Made of UV-resistant self-adhesive Teflon and can be cut to measure. They prevent wear due to chafing and do not damage gelcoat or painted surfaces.

Code	Content
06.315.00	4 pcs. (100 x 150 mm)

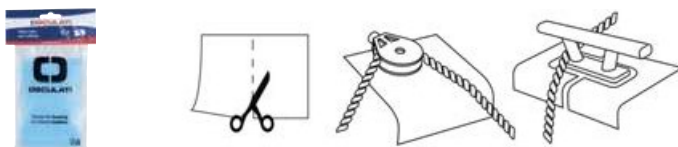

Adhesive anti-chafe SS sheets

Extra flexible stainless steel sheets to protect boat gelcoat and paint against any damage caused by rope chafing. Suitable to protect from chafing caused both by mooring and manoeuvring lines. Made of stainless steel and provided with 3M VHB™ powerful adhesive tape. Gelcoat and paint are preserved

Code	Dimensions mm	Sheet No.	Material
06.313.15	150 x 50	1	SS
06.313.22	225 x 50	1	SS



Straps, tapes and accessories



Polypropylene webbing band for hiking straps or other purposes

ideal for deck fastening of accessories such as buckles, plates, etc.

Colour				Roll m	Height mm
Orange	White	Black	Blue		
06.400.30AR	06.400.30BI	06.400.30NE	06.400.30BL	100	30
06.400.40AR	06.400.40BI	06.400.40NE	06.400.40BL	100	40
06.400.50AR	06.400.50BI	06.400.50NE	06.400.50BL	100	50



▲06.401.25

▲06.402.01/02

High-strength polyester webbing band

Very soft, UV-resistant, white colour.

Code	Ideal for	Width mm	Breaking load kg	Roll m
06.401.25	Life-line	25	2000	50
06.402.01	mounting and lifting	135	7500	50
06.402.02	mounting and lifting	165	9000	50



▲06.401.25




▲06.402.01/02



Stainless steel buckles

Black nylon sliders. For multiple purposes. **Open**-type version.

Code	For straps up to mm	Max load kg	OPTIONAL fixing plate
06.706.30	30	140	-
06.706.40	40	140	-
06.706.50	50	140	06.707.00

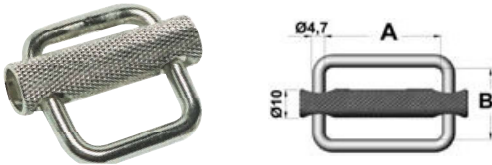

Stainless steel buckle with slider

High resistance. Suitable for fastening liferafts.

Code	For straps up to mm	Max load kg	A mm	B mm	OPTIONAL fixing plate	ORDER BY BOX
06.709.25	25	900	26	24	-	10
06.709.40	40	900	41	25	-	10
06.709.50	50	900	52	27	06.707.00	10



Stainless steel buckle to be sewn

For multiple applications: awnings, cushions, belt adjustment, etc. With spring lock.

Code	For straps up to mm	Max load kg	Version
06.441.33	25	500	runner to be sewn in strap



White plastic buckle

For multiple purposes: awnings, cushions, belt adjustment, etc.

Code	For straps up to mm	Version
06.441.30	30	for hull mounting with screws
06.441.31	30	runner to be sewn in strap



Sea Sure black nylon buckle

Lightweight and rugged.

Code	For straps up to mm	Max load kg
06.708.40	40	360
06.708.50	50	360



Adjustable stainless steel buckle

For multiple uses. To be sewn.

Code	For straps up to mm	Max load kg
06.702.40	40	320



4-bar stainless steel buckle

AISI 304

It enables to make terminal eyes on tapes to **avoid seams**. Mirror-polished AISI304 stainless steel.

Code	For straps up to mm	ORDER BY BOX
06.710.30	30	2
06.710.40	40	2
06.710.50	50	2



Stainless steel strap buckle

For tensioning awning straps. Fitted with spring lock.

Code	A mm	B mm	C mm	D mm
06.441.36	62	35	25	21



AISI316 stainless steel shackle with buckle

AISI 316 Built-in high-strength buckle.

Code	For straps up to mm	ORDER BY BOX
09.250.20	25	10



Stainless steel plate for straps

For deck- or bulkhead-mounting of the strap.

Code	mm
06.709.01	40x40
06.709.02	62x40
06.709.03	50x16



White nylon flat eye strap

It lets the strap slide through or is a starting point for it.

Code	Width mm	ORDER BY BOX
06.703.30	30	10
06.703.40	40	10
06.703.50	50	10



AISI316 stainless steel flat eye strap

It lets the strap slide through or is a starting point for it.

Code	Width mm	Dimensions mm	Bore central distance mm	ORDER BY BOX
06.701.30	30	48x15	38	10
06.701.40	40	60x15	51	10
06.701.50	50	68,5x15	55	10



Deck U-bolts

AISI 316 For fixing nylon straps. Made of mirror-polished AISI316 stainless steel.

Code	Width mm	Thickness mm	ORDER BY BOX
06.704.40	40	5	10
06.704.50	50	6	10



4-arm lifting system for boats and dinghies

This kit is designed to offer several hooking point combinations when different lengths are reached ensuring the correct balance while lifting the boat. User-friendly system that can be easily modified at each haulage. It can also be used as 3-arm system. Lengths can be modified as follows:

- Crane side, using (or not) the yellow ring (+0.5 m)
- Boat side, adding half the extension strap (+0.5 m) or the whole of it (+1 m).

The kit includes:

- 2 x 3-m short straps (A)
- 2 x 3,3-m long straps (B)
- 1 x 0.5-m yellow ring for crane hooking (C)
- 2 x 1-m extension straps (D)
- 4 x shackles (E).

Code	Short strap A		Long strap B		Breaking load kg	Boatlength m
	Dimensions cm	Possible lengths cm	Dimensions cm	Possible lengths cm		
06.587.01	300x5	300 - 350	330x5	330 - 380 - 430 - 480	4000	4,5 / 6
06.587.02	390x5	390 - 440	520x5	520 - 570 - 620 - 670	4000	6 / 7,5
06.587.03	500x5	500 - 550	600x5	600 - 650 - 700 - 750	4000	7,5 / 9

