

## Mast steps

### Foldable step

- AISI 316** Foldable step ideal for aluminium masts.
- EPDM anticorrosion gasket.
  - Anti-vibration device with adjustable nylon grub screw.
  - Large anti-slip step.
  - Made of mirror-polished AISI316 stainless steel.
- Installation with M6 screws.

Code	Mounting base mm	Size mm	
		closed	opened
59.806.00	109x65	38	145



**OSCOLATI**



### Foldable mast step

Made of stainless steel, fitted with anti-skid soft nylon coating.


Code	Base mm	Size mm	
		closed	opened
59.805.00	85x60	25	108



### Mast steps made of 6 mm round bars

- AISI 316** AISI 316 stainless steel; ideal for mast climbing without a bosun's chair, total safety, universal size to fit any type of mast; it is recommended to set a centre-to-centre space of 60 cm between the steps.

Code	LxHxD mm
59.804.00	17,5x21,5x21,5

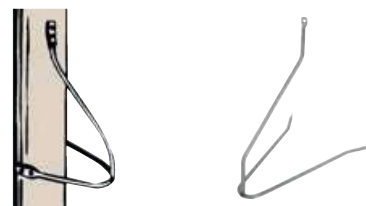

### Step for mast

Made of stainless steel with anti-skid teak walking surface.

Code	LxHxD mm
59.803.00	286x130x16



### Anti-torsion ladder for mast climbing

Made of webbing tape and aluminium steps. The ladder has to be fixed at the mast base with the fixings supplied (ideally fixed under the boom goose neck fitting) and has then to be put under tension by means of a halyard winch. The ladder will be stiff and stable: even if you lose your balance, the ladder keeps still and doesn't twist.

The total length of the ladder shall be shorter than the mast length for utmost stretching. When the upper end of the ladder is fully stretched, a man standing on the uppermost step should have his thorax at the same height of the masthead. Adjust the ropes for the correct length.

See instructions.

Code	Colour	For masts (l) height m	Ladder length m
59.807.04	Grey	10	8,80
59.807.05	Blue	12	10,80
59.807.07	Orange	14	12,60
59.807.09	Yellow	16	14,90

